


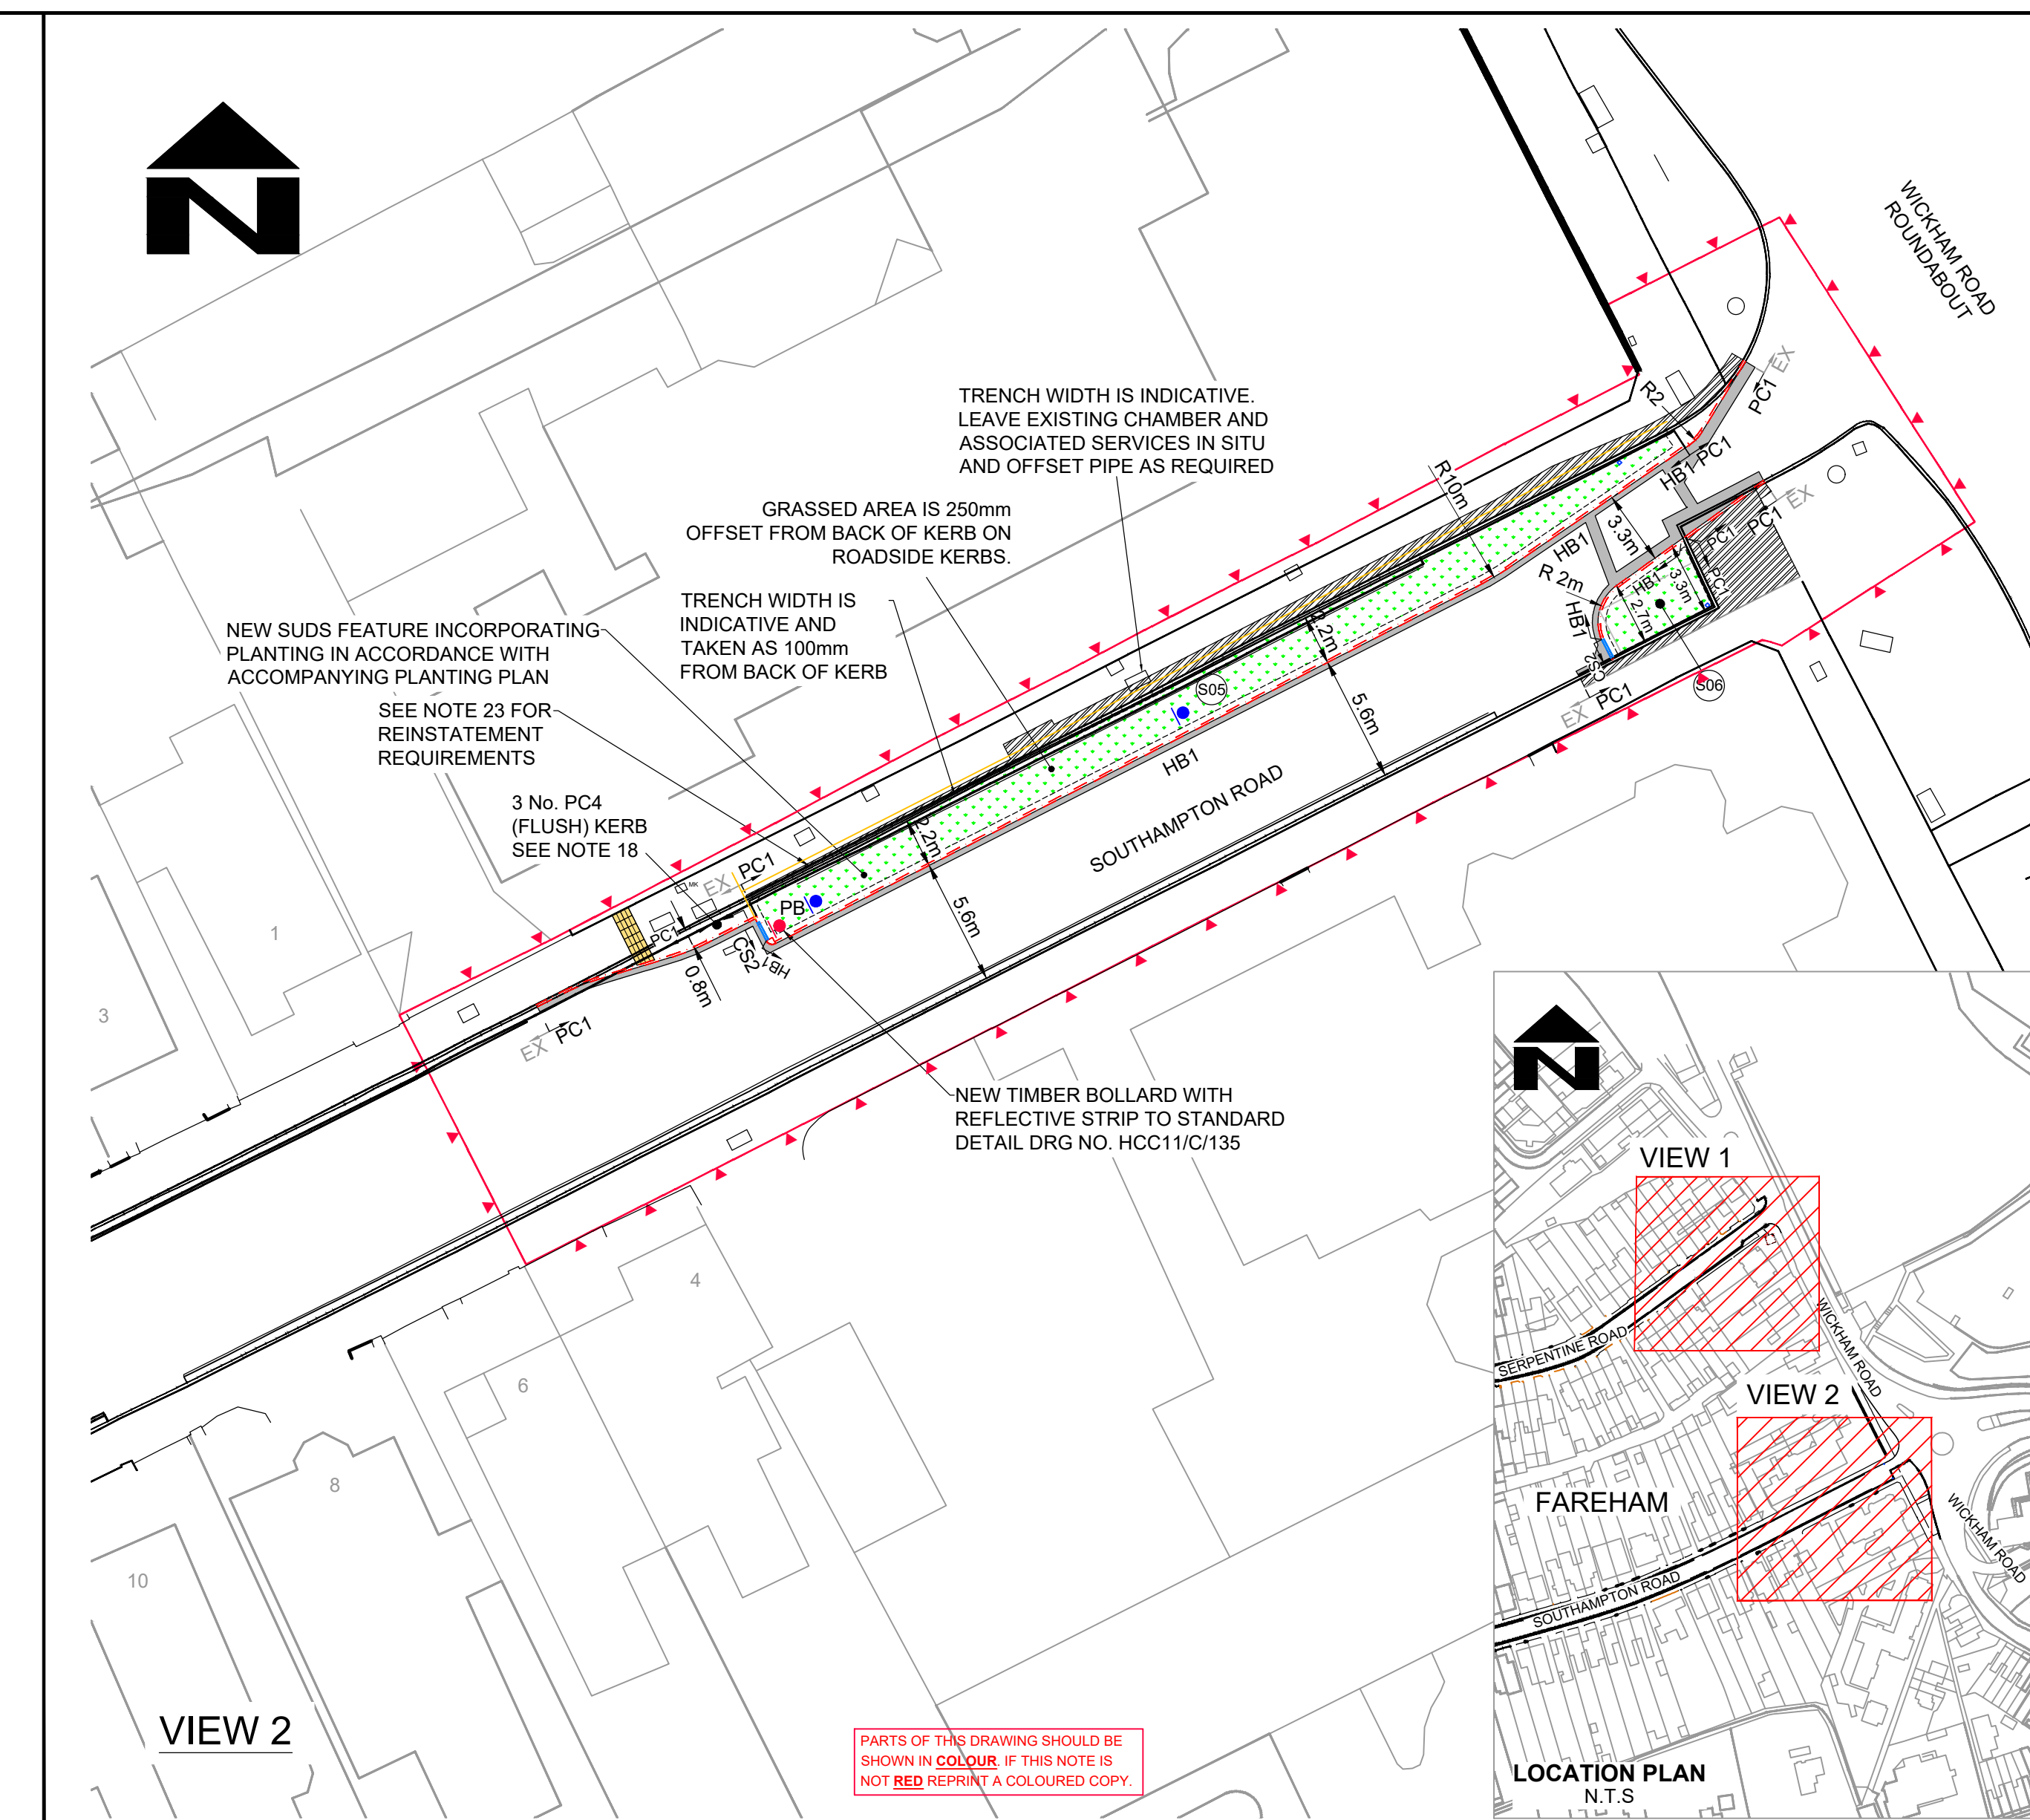

NOTES

GENERAL

1. DO NOT SCALE FROM THIS DRAWING, REFER TO FIGURED DIMENSIONS ONLY. THE CONTRACTOR SHOULD CHECK ALL DIMENSIONS ON SITE.
2. ALL DIMENSIONS IN METRES AND ALL LEVELS ARE IN METRES UNLESS OTHERWISE STATED.
3. THIS DRAWING SHOULD BE READ IN CONJUNCTION WITH ALL OTHER RELEVANT ARCHITECT AND ENGINEERING DETAILS, DRAWINGS AND SPECIFICATIONS AS SPECIFIED IN THE CONTRACT DOCUMENTS.
4. ANY DISCREPANCIES SHOULD BE REPORTED TO THE OVERSEEING ORGANISATION IMMEDIATELY, TO CLARIFY BEFORE STARTING WORK.
5. THE CONTRACTOR AND SUBCONTRACTOR'S RESPONSIBILITY TO ENSURE COMPLIANCE WITH THE CURRENT CODES OF PRACTICE, STANDARDS AND PRODUCT MANUFACTURES DETAILS AND SPECIFICATION.
6. THE CONTRACTOR IS TO KEEP A RECORD OF ANY VARIATIONS AGREED DURING THE DURATION OF THE WORKS, INCLUDING THE RELOCATION OF SEWERS OR DRAINS, SO THAT AN "AS-CONSTRUCTED" DRAWING CAN BE PREPARED UPON COMPLETION OF THE PROJECT.
7. FOR DETAILS OF THE SITE CLEARANCE REFER TO DRG NO. RJ510384-HEH-HSIC-14427639-DR-C5001.
8. FOR DETAILS OF THE DRAINAGE REFER TO DRG NO. RJ510384-HEH-HDG-14427639-DR-C5001.
9. FOR DETAILS OF THE PLANTING SPECIFICATION REFER TO DRG NO. RJ510384-HEH-ELS-14427639-DR-C5001.
10. FOR DETAILS OF THE EXISTING SERVICES REFER TO DRG NO. RJ510384-HEH-VUT-14427639-DR-C5001.
11. ALL NON STANDARD DETAILS, REFERRED TO ON THIS DRAWING, ARE TO THE CURRENT REVISION AT THE DATE OF ISSUE UNLESS OTHERWISE STATED.
12. WORKS AREA TO REMAIN WITHIN HIGHWAY BOUNDARY AND TO BE CONFIRMED WITH OVERSEEING ORGANISATION.

KERBS

13. KERBS UPSTANDS TO BE AS SHOWN IN KEY. PCC PLAT-TOP
EDGING TO BE USED AT THE BACK OF FOOTWAYS/VERGES TO
APPENDIX 1/1/1
14. THE APPROPRIATE 914mm LONG PRECAST CONCRETE
TRANSITION KERB SHALL BE INSTALLED AT EACH CHANGE IN
CYCLE TYPE, TIE-INS TO EXISTING AND AT TERMINATIONS.
15. THE MINIMUM LENGTH OF EACH CUT KERB SHALL BE 450mm.
FOR DRAINAGE REFER TO DRG NO.
- RJ510384-HEH-HDG-14427639-DR-CD-5001.
16. KERBS ON SUBS BUILD-OUTS TO BE AS SHOWN IN DRG NO.
- RJ510384-HEH-HSE-14427639-DR-D5001 TO -5003.
17. WHERE CYCLIST ENTER SHARED CYCLE WAY 3 No. PC3 KERBS
TO BE INSTALLED WITH APPROPRIATE DROPPER KERBS.

SIGNS AND ROAD MARKINGS

19. FOR DETAILS OF THE SIGNAGE AND LINING REFER TO DRG NO. RJ510384-HEH-HMS-14427639-DR-CD-5001
20. ALL PROPOSED SIGNING AND LINING IS TO BE IN ACCORDANCE WITH THE TRAFFIC SIGNS REGULATIONS AND GENERAL DIRECTIONS 2016 AND TO THE SATISFACTION OF THE HIGHWAYS INSPECTOR.
21. ALL ROAD MARKINGS TO BE IN ACCORDANCE WITH APPENDIX 12/3 AND ALL SIGNS TO APPENDIX 12/1

REINSTATEMENT

22. ALL REINSTATEMENT TO BE TO APPENDIX 7/2 AND IN REFERENCE TO HCC11/C/090 AND HCC11/C/095 AS APPROPRIATE.
23. REINSTATEMENT TRENCH WIDTHS SHOWN ARE INDICATIVE. SEE NOTE 11 ON DRG NO. RJ510384-HEH-HSC-14427639-DR-CD-5001 FOR MORE DETAIL ON TRENCH WIDTHS.
24. FOR REINSTATEMENT REQUIREMENTS REFER TO SUDS DETAIL DRG NO. RJ510384-HEH-HSE-14427639- DE-D-5001 & 5002

KEY

- | | |
|---|--|
|  | HIGHWAY BOUNDARY/SITE EXTENT |
|  | INDICATIVE EXTENT OF CARRIAGEWAY REINSTATEMENT SEE NOTE 21 |
|  | PLANTING WITHIN NEW SuDS FEATURES (SEE NOTE 9) |
|  | INDICATIVE EXTENT OF FOOTWAY REINSTATEMENT SEE NOTE 21 |
|  | PROPOSED CORDOURRY TACTILE PAVING |
|  | PROPOSED PC1 KERB, REFER TO HCC STANDARD DETAIL HCC11/C/010 FOR PCC CHANNEL REFER TO HCC STANDARD DETAIL HCC11/M/010 ? |
|  | EXISTING KERB |
|  | PROPOSED HB1 KERB, REFER TO Drg No R.J510384-HEH-HSE-14407639-DE-CD-5001 |
|  | PROPOSED HB1 KERB WITH 50mm UPSTAND FOR OVERFLOW |
|  | PROPOSED PCC EDGING KERB , REFER TO HCC STANDARD DETAIL HCC11/C/045 |
|  | PROPOSED CS2 CHANNEL KERB |
|  | NEW TIMBER BOLLARD WITH REFLECTIVE STRIP TO STANDARD DETAIL DRG NO. HCC11/C/135 |
|  | EXISTING SIGN TO BE RELOCATED, SEE NOTE 19 |
|  | NEW CYCLE SIGNS TO BE INSTALLED SEE NOTE 19 |
|  | ROAD MARKINGS SEE NOTE 18 |
|  | ROOT PROTECTION AREA |
|  | 1m LONG 90Ø VEHICLE BARRIER TO BE 300mm FROM WALL AND SPACED 1m APART. SEE DETAIL C |

[illegible]

SOUTHERN WATER SERVICES LTD



Hampshire
County Council

Engineering Services

TIM LAWTON BEng CEng FICE FCIHT : ASSISTANT DIRECTOR OF UNIVERSAL SERVICES

HORIZONTAL SCALE @ A	1:250
VERTICAL SCALE @ A1	N/A
SHEET NUMBER	1 OF 1

SCHEME

SOUTHAMPTON ROAD
SuDS RETROFIT

JOB No. R.J510384.01

DRAWING TITLE

PHASE 2B (S03, S05, S06)
DRAINAGE

HCC CAD PLOT: 08/7/2026 15:15:04

SUIT REV
S3 P01